

Transmitter for Analog Pt-100 Temperature Signal

Types G 3210 1111, G 3210 1112, G 3210 1113

Dupline®
Fieldbus Installationbus



- AnaLink transmitter for 3-wire Pt-100 input
- Built-in cable compensation
- Built-in signal linearization
- Temperature range:
 - G 3210 1111: -50 to +40°C (-58 to +104°F)
 - G 3210 1112: +30 to +120°C (+86 to +248°F)
 - G 3210 1113: -10 to +100°C (+14 to 212°F)
- Uses only one channel
- Supplied by Dupline®
- Channel coding by GAP 1605
- H2-housing
- For mounting on DIN-rail in accordance with EN 50 022

Product Description

AnaLink transmitter for connection of external 3-wire Pt-100 temperature transducer. The module measures the temperature and transmits the value to the controller G 3890 0030, in which the temperatures from all transmit-

ters are logged and printed out and/or read from a PC.

The module is supplied by the Dupline® signal which means easy installation and flexibility for future expansion.

Ordering Key

G 3210 1111

Type: Dupline®

H2 Housing

Temperature range

Type Selection

Supply:	Ordering no. Range: -50 to +40°C
By Dupline®	G 3210 1111

Ordering no. Range: +30 to +120°C	Ordering no. Range: -10 to +100°C
G 3210 1112	G 3210 1113

Input Specifications

Signal input Temperature range	3-wire Pt-100 G 3210 1111: -50 to +40°C G 3210 1112: +30 to +120°C G 3210 1113: -10 to +100°C
Resolution	8 bits (~0.35°C/LSB) (G3210 1113: (0.43°C/LSB))
Inaccuracy	≤ 0.5°C (G3210 1113: ± 0.6°C) (ambient temperature G 3210 111.: 25°C)
Temperature drift	≤ 0.02°C/°K (Δ ambient temperature G 3210 111.)
Cable length	≤ 5 m
Response time	256 pulse trains (~18 s @ 64 ch.)


General Specifications

Channel programming	By GAP 1605
Channel assignment	1 channel freely programmable
Environment	Degree of protection IP 20 Pollution degree 3 (IEC 60664) Operating temperature 0 to +50°C (+32 to +122°F) Storage temperature -50 to +85°C (-58 to +185°F)
Humidity (non-condensing)	20 to 80% RH
Mechanical resistance	Shock 15 G (11 ms) Vibration 2 G (6 to 55 Hz)
Dimensions	(See Technical Information)
Material	
Weight	90 g


Supply Specifications

Current consumption Power dissipation	≤ 1.8 mA (from Dupline®) ≤ 10 mW
--	-------------------------------------


Distance versus No. of Sensors

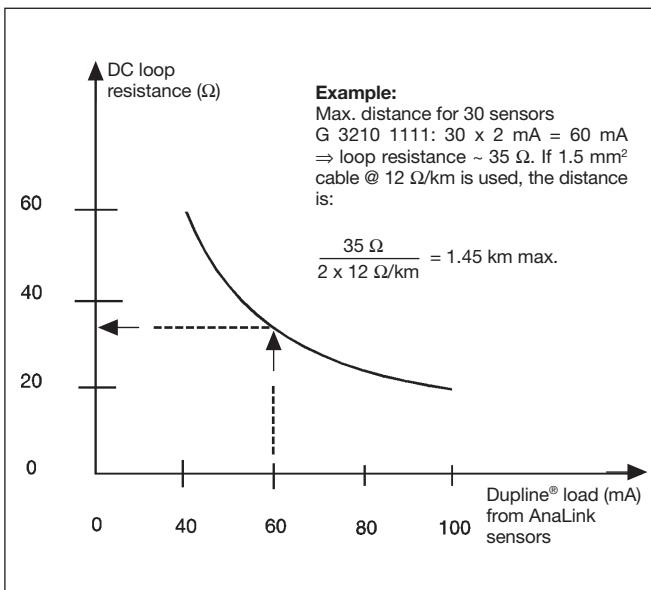

Wiring Diagram

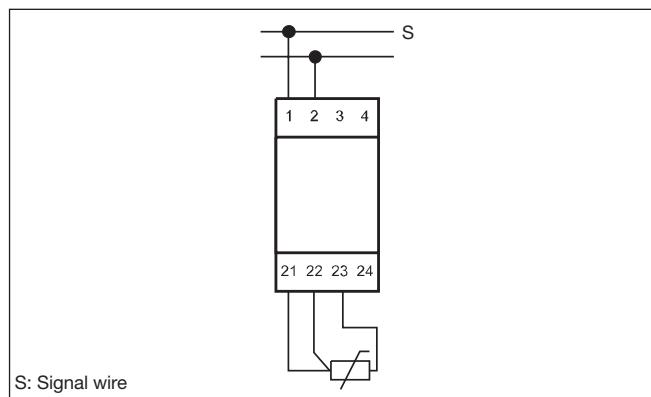

Dimensions (mm)

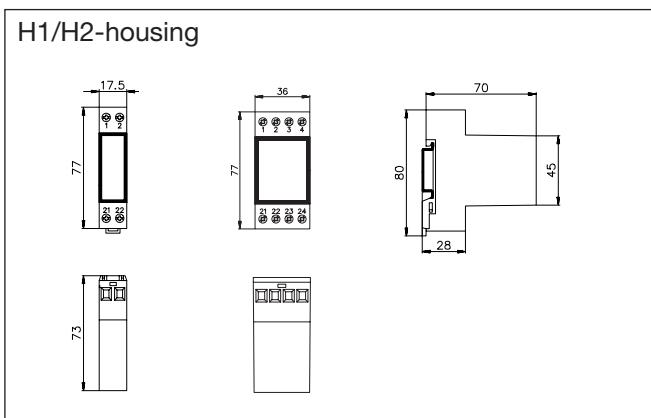

Accessories

DIN-rail

FMD 411

For further information refer to "Accessories".